

## 应用领域 | Application


- 专业安防网络摄像头 | Professional IP Camera



## 产品特点 | Features

- 高质量专业图像处理  
High quality professional ISP
- 内置64MB内存, 最大支持4百万像素  
Internal 64MB DDR, support up to 4MP
- 与FH8856V200管脚兼容  
Pin to pin compatible to FH8856V200

## 主要模块 | Block Diagram

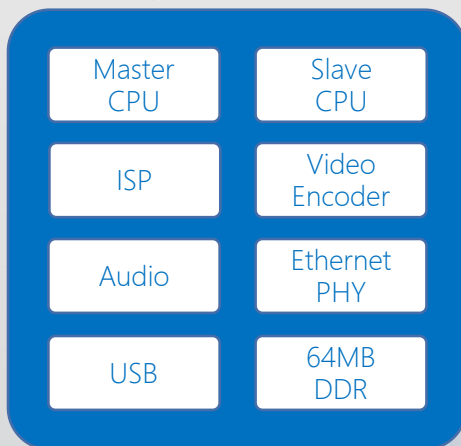

## 产品规格 | Specifications

CPU	Master CPU: up to 696MHz Slave CPU: up to 464MHz
CIS	Support up to 4MP inputs 2-lane MIPI, RGB bayer
ISP	2-frame WDR, local tone mapping 2DNR, 3DNR AE/AWB/AF
Video Encoder	H.264/H.265 video encoder Support up to 4MP Support multi-streams: videox2+JPEGx1 JPEG: up to 4MP@5fps
Audio	Single ADC & DAC Support 8K~48KHz sampling rate Support echo cancellation
Ethernet	Internal 10M/100M Ethernet PHY 3xI2C, 3xSPI, 3xUART, 2xSDIO
Peripherals	1xUSB2.0 2xSADC, 12xPWM
Memory	Internal 64MB DDR2
Package	QFN88, 9mmx9mm

